

# SUBMITTAL DATA SHEET

NI\_AP\_IN\_0076.docx  
Rev. -0 of 09/02/2023



## NIRON CLIMA ALLPRO FITTINGS 90° PREINSULATED STANDARD BEND

**ITEM:** 27NGAP\_9MM  
**SIZE RANGE:** 1" (32 mm) ÷ 12" (315 mm)  
**SDR:** 9  
**FUSION RANGE:** For Butt Fusion – SDR 9 and up  
For Electrofusion – SDR 9 and up



**MATERIAL:** PP-RCT + Fiber glass + PUF + PPR jacket  
**COLOR:** Grey (carrier pipe) + Grey with white outer layer (jacket pipe)

**WELDING SYSTEM:**  

### INSTALLATION INSTRUCTIONS:

In accordance with DVS 2207, ASTM D2657 and NUPI AllPro Niron Catalog/Price Sheet


### LISTINGS:

uNSF-14; ICC-ES; IAPMO

### STANDARDS:

ANS/NSF 14; ASTM F2389; CSA B137.11; CAN/ULC S102.2

### MAXIMUM OPERATING PRESSURE:

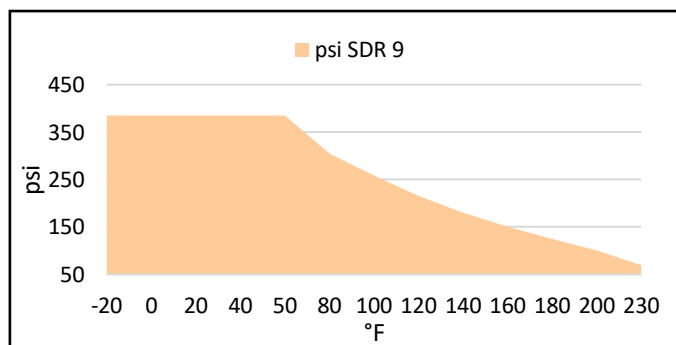


### LINEAR EXPANTION RATE:

0.23 in /10°F/100 ft

For code or standard question pertaining to NIRON CLIMA AllPro Pipe and Fittings, contact Nupi Americas.

### MINIMUM INSULATION THICKNESS PER ASHRAE STANDARD 90.1:

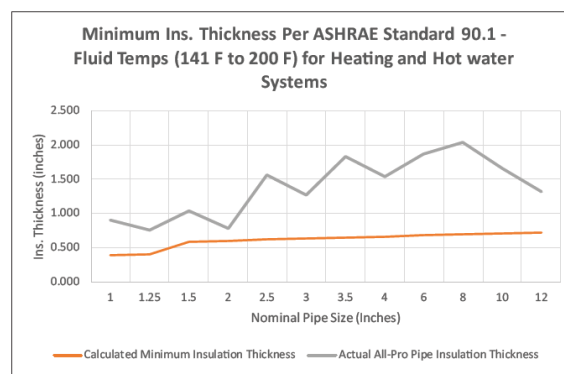

### PRODUCT INFORMATION AND APPLICATION USE:

Niron AllPro preinsulated fittings are manufactured with Niron Clima PP-RCT carrier components that are housed within an IPS Sch. 40 jacket that is extruded with a 30 year U.V. resistant white PP-RCT external layer. The fittings are super insulated with highly efficient closed cell polyurethane foam (PUF) insulation which exceeds the required thickness for the ASHRAE 90.1 Energy Code in all sizes. This style of fitting has carrier pipes extended to allow joining by the AllPro EF or BF method. Each fitting is available in an optional "extended version" which has the centerline-to-end dimension of the fittings extended to allow for clamping in butt fusion machines which have a wide clamp set-up.




Nupi Americas, Inc.  
314 Commerce Parkway  
Early Branch, SC 29916  
Phone: 813-398-3579  
Fax: 813-398-3639  
Mail: [info@nupiamericas.com](mailto:info@nupiamericas.com)  
Website: [www.nupiamericas.com](http://www.nupiamericas.com)


# SUBMITTAL DATA SHEET

NI\_AP\_IN\_0076.docx  
Rev. -0 of 09/02/2023

TYPE A

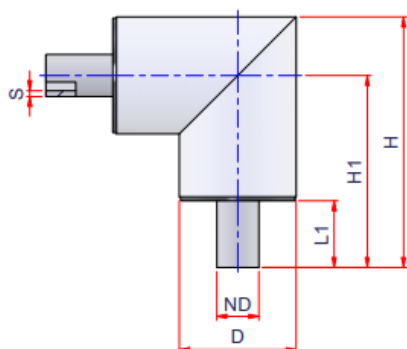

TYPE B

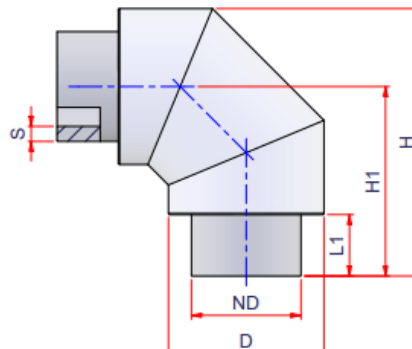

CODE	TYPE	Weight lbs/pc	Volume ft <sup>3</sup> /pc	ND	D	S	L1	H1	H
27NGAP329MM	A	0.924	0.0923	1" => 32 mm	3.5	0.14	2	5	6.75
27NGAP409MM	A	1.091	0.0923	1 1/4" => 40 mm	3.5	0.18	2	5	6.75
27NGAP509MM	A	1.986	0.1882	1 1/2" => 50 mm	4.5	0.22	2.5	6.25	8.5
27NGAP639MM	A	2.482	0.1882	2" => 63 mm	4.5	0.28	2.5	6.25	8.5
27NGAP759MM	A	5.073	0.4906	2 1/2" => 75 mm	6.63	0.33	3	8	11.31
27NGAP909MM	A	6.303	0.4906	3" => 90 mm	6.63	0.4	3	8	11.31
27NGAP1109MM	A	12.006	1.0951	3 1/2" => 110 mm	8.63	0.48	4	10.5	14.81
27NGAP1259MM	A	14.184	1.0951	4" => 125 mm	8.63	0.55	4	10.5	14.81
27NGAP1609MM	A	22.006	1.8781	6" => 160 mm	10.75	0.71	4.5	12	17.38
27NGAP2009MM	A	40.034	3.3712	8" => 200 mm	12.75	0.88	5	15	21.38
27NGAP2509MM	B	23.672	4.6667	10" => 250 mm	14	1.1	5.5	17	24
27NGAP3159MM	B	37.149	6.5023	12" => 315 mm	16	1.39	5	18.5	26.5

## MANUFACTURER'S WARRANTY:

Thirty (30) Years from the date of sale upon successful completion of pressure test of the piping system (refer to published warranty for complete details).

## NOTE:

\* More information can be found on AIPro NIRON TECHNICAL CATALOGUE

\*\*\* In order for Niron pipe and fittings to meet E-84 and/or CAN/ULC S102.2 for installation in a plenum application, it must be covered with a minimum of 1" or greater E-84 fiberglass insulation

\*\*\*\* Technical Data may undergo dimensional changes, check revision at the top



Nupi Americas, Inc.  
314 Commerce Parkway  
Early Branch, SC 29916  
Phone: 813-398-3579  
Fax: 813-398-3639  
Mail: [info@nupiamericas.com](mailto:info@nupiamericas.com)  
Website: [www.nupiamericas.com](http://www.nupiamericas.com)